



رمز المنتج بالمختبر: C-138



| | |
|-----------------|--|
| Laboratory name | Saudi Inspection and Testing Company |
| Address | First Industrial Area – Street No 4,5,6,7–Riyadh |
| Country | Saudi Arabia |

| | |
|--|--|
| Date or period of tests | 30 / 4 / 2023 – 2 / 5 / 2023 |
| Date of report issue | 03 / 05 / 2023 |
| Laboratory test report number | E-230485-1 |
| Client Reference No. | 05204004E/23 |
| Client / factory / Manufacturer Name & address | SAUDI CERAMICS Company P.O. Box 3893 .Riyadh – Saudi Arabia 11481 |

| | |
|-------------------------|-------------------------------|
| Product description | Electric Storage Water Heater |
| Brand name or trademark | SAUDI CERAMICS |
| Model No. | EWB-V30SL |
| Country of origin | Saudi Arabia |

| | |
|-------------------------------|---|
| Product category | Water Heaters - Energy Performance Requirements and Labeling |
| Standard | SASO 2884:2017 BS EN 50440:2015 |
| Conformity to articles tested | <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No |

| | |
|---|-----------|
| Test case verdicts | |
| Test case does not apply to the test object | : N (.A.) |
| Test item does meet the requirement | : P(ass) |
| Test item does not meet the requirement | : F(ail) |

Note: The result recorded in this document only related to the item tested.

ملاحظة : النتائج المدونة في تقرير التحكم في النتائج لا تمثل إلا العينة المختبرة



ELECTRICAL LAB
TECHNICAL Dep

| SASO 2884: 2017 | | | |
|-----------------|--------------------|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |

| | | | |
|------------|---|--------|---|
| 4 | Criteria for applying the Minimum Energy Performance Standard (MEPS) | | |
| 4.1 | Declaration of rated values | - | - |
| | The declaration of the rated capacity shall be expressed only in terms of liters (l) according to the following rules | - | P |
| | - rated capacity lower or equal to 14 liters as multiples of 1 liter | - | N |
| | - rated capacity from 15 liters as multiples of 5 liters | 30L | P |
| | The declaration of the rated power shall be expressed only in terms of watt (W) as multiples of 50 W. | 1200W | P |
| | The rated annual energy as a multiple of 5 kWh | 630kWh | P |

| 4.2 | Determining the Minimum Performance | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|------|-------|-------|-------|-------|--------------|--------|-----|-----|--|---|--|--|--|--|--|--|--|--|--|-----------------------|-----|-----|----|---|---|---|----|-----|-----|-----|--|----|----|----|----|----|----|----|----|----|----|------------------------------|--|
| 4.2.1 | General | | | | | | - | | | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Minimum energy performance are based on the Water Heating Energy Efficiency | | | | | | - | | | P | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.2.2 | Declaration of the Load Profile | | | | | | - | | | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Declared a load profile as described in Annex A | | | | | | - | | | N | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Declared load profiles of 3XS, XXS, XS and S | | | | | | - | | | N | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3XS shall not exceed 7 litres in capacity | | | | | | - | | | N | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | XXS and XS shall not exceed 15 litres in capacity | | | | | | - | | | N | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | S shall not exceed 36 litres in capacity | | | | | | 30L | | | P | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AMD 4 | For storage water heaters with declared load profile M, L, XL, XXL, 3XL and 4XL, the requirements of mixed water At 40 °C shall be as illustrated in table below | | | | | | - | | | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Declared Load Profile | | M | L | XL | XXL | 3XL | | 4XL | | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mixed Water at 40 °C | | 65 L | 130 L | 210 L | 300 L | 520 L | | 1040 L | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.2.3 | Minimum Energy Performance Standard (MEPS) for Water Heaters | | | | | | | | | | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | The water heater MEPS values are presented in Table 1. | | | | | - | | | | | P | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table><tr><th colspan="11">Table 1 – MINIMUM ENERGY EFFICIENCY (η_{wh}) in %</th></tr><tr><th>Declared load profile</th><th>3XS</th><th>2XS</th><th>XS</th><th>S</th><th>M</th><th>L</th><th>XL</th><th>2XL</th><th>3XL</th><th>4XL</th></tr><tr><td>Water heaters energy efficiency (with or without smart controls)</td><td>53</td><td>55</td><td>63</td><td>63</td><td>73</td><td>73</td><td>79</td><td>79</td><td>79</td><td>79</td></tr></table> | | | | | | | | | | Table 1 – MINIMUM ENERGY EFFICIENCY (η_{wh}) in % | | | | | | | | | | | Declared load profile | 3XS | 2XS | XS | S | M | L | XL | 2XL | 3XL | 4XL | Water heaters energy efficiency (with or without smart controls) | 53 | 55 | 63 | 63 | 73 | 73 | 79 | 79 | 79 | 79 | Measured η_{wh} 74.1 8% | |
| Table 1 – MINIMUM ENERGY EFFICIENCY (η_{wh}) in % | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Declared load profile | 3XS | 2XS | XS | S | M | L | XL | 2XL | 3XL | 4XL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Water heaters energy efficiency (with or without smart controls) | 53 | 55 | 63 | 63 | 73 | 73 | 79 | 79 | 79 | 79 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.2.4 | Minimum Energy Performance Standard (MEPS) for Hot Water Storage Tanks | | | | | | | | | | | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Minimum energy performance standard (MEPS) requirements for hot water storage tanks with capacities higher or equal to 25 liters are based on the daily thermal losses QPR. | | | | | | - | | | | N | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | The limit values for QPR are expressed in table 2, rounded to 2 decimal places. | | | | | | - | | | | N | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.2.5 | Test Voltage | | | | | | - | | | | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AMD 4 | The products shall be tested at 230V for single-phase, and shall be at 400V for three phase. | | | | | | Applied 230V | | | | P | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| SASO 2884: 2017 | | | |
|-----------------|--------------------|-----------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |

| | | | | | | |
|-------|---|---|--------------|-----------------|-----------------------|----------------|
| 4.3 | Acceptance Criteria for Labelling and Market Surveillance | | | | | - |
| | <i>The energy label shall be accepted as valid when a sample unit(s) tested meets the following criteria:</i> | | | | | - |
| | TABLE: Acceptance Criteria for Labelling and Market Surveillance | | | | | - |
| | Measured Point | Acceptance Criteria | Rated | Limit | Measured Value | Verdict |
| | a.) Tested Power (W) | $\geq 0.90 \times \text{rated power}$ | 1200W | 1080W | 1101W | P |
| | b) Tested Power (W) | $\leq 1.05 \times \text{rated power}$ | | 1260W | | |
| | c) Tested thermal losses (QPR) | $\leq 1.05 \text{ rated QPR, rated}$ | - | - | - | N |
| | d) Tested Standing loss power (S) | $\leq 1.05 \text{ rated S}$ | - | - | - | N |
| AMD 3 | e.) Capacity (L) | $\geq 0.95 \times \text{rated Capacity}$ | 30L | $\geq 28.5L$ | 30L | P |
| | f.) Mixed quantity of water (V_{40}) | $\geq 0.97 \times \text{rated } V_{40}$ | - | - | - | N |
| | g.) Tested Energy (any type) | $\leq 1.05 \times \text{rated annual energy}$ | 630kWh | $\leq 661.5kWh$ | 638kWh | P |
| | h) Tested Collector Aperture (m^2) | $\geq 0.98 \times \text{rated value}$ | - | - | - | N |
| | i) Tested Standby Power $P_{sol;stby}$ | $\leq 1.03 \text{ rated } P_{sol;stby}$ | - | - | - | N |
| | j) Tested Pump power consumption $P_{sol;pump}$ | $\leq 1.03 \text{ rated } P_{sol;pump}$ | - | - | - | N |
| | Qelec | - | 2.993kWh | - | 3.05kWh | - |

| | | | |
|-------|--|----------------------------------|---|
| 5 | Label and classification | | |
| 5.1 | Determining the energy efficiency class | - | - |
| | Energy efficiency for the maximum load profile shall be used to determine the classification as outlined in table 3 and 4. | Energy efficiency label provided | P |
| 5.2 | Design and placement of the label | - | - |
| AMD 4 | The label shall be printed as illustrated in Figure 1. | - | P |
| | The label shall be visible and fixed on the most prominent part the of the product | - | P |
| | Another label shall be fixed and non-removable on the product packaging | - | P |
| | Energy efficiency classes shall be represented with a visible letter and color-coded bars as outlined in Table 3 and illustrated in Figure 1 | - | P |
| | The label dimensions shall be 100 mm wide and 170 mm high. | See table | P |
| | In case of instantaneous type, the label dimensions shall be 45 mm wide and 75 mm high | Electric storage water heater | N |
| 5.3 | Information and values contained on the label | - | - |

| SASO 2884: 2017 | | | |
|-----------------|--|-------------------------------|---------|
| Clause | Requirement – Test | Result - Remark | Verdict |
| | The fields (a) to (k) shall comply with the following requirements: | - | - |
| | a) SASO Logo | Provided | P |
| | b) energy efficiency class | E | P |
| AMD 1 | c) this field identifies the annual energy consumption of all types of water heaters | 630kWh | P |
| | d) water heating function, including declared load profile | S | P |
| | e) electric power of the water heater in kW | 1.2kW | P |
| | f) capacity of the water heater (or hot water storage) in liters | 30 LITERS | P |
| | g) specific product information | VERTICAL | P |
| | h) QR code | Readable | P |
| | i) general product information: | - | - |
| | - Brand name | Saudi Ceramics | P |
| | - Country of origin | Saudi Arabia | P |
| | - Model number | EWB-V30SL | P |
| AMD 2 | j) this field identifies the SASO standard applicable and registration number | SASO 2884:2017 E07471/2018 | P |
| | k) legal statement | Provided | P |
| 6 | Marking and instructions | | |
| 6.1 | General information | - | - |
| | The following information shall be marked on the nameplate of the water-heater in English or Arabic and English | English | P |
| | The marking shall not be on a detachable part of the unit and shall be indelible, durable and easily legible | Durable | P |
| | Any information related to energy performance added on any part of the water heater unit or packaging shall not have any ambiguity or lead to misunderstanding of the performance of the unit | - | P |
| 6.2 | Nameplate information | - | - |
| | The nameplate information shall include , for conformity to this standard the following information: | - | - |
| | • Manufacturer's name and/or trademark | SAUDI CERAMICS | P |
| | • Country of origin | Saudi Arabia | P |
| | • Manufacturer's model or type reference and serial number of the unit | EWB-V30SL | P |
| | • Rated voltage or rated voltage range in volts (V) | 220-240V | P |
| | • Rated frequency in hertz (Hz) | 50/60Hz | P |
| | • Rated power input in Watt (W) or kiloWatts (kW) | 1200W | P |
| | • Rated Capacity | 30L | P |
| | • Annual standby losses (kWh/year) or daily standby losses (kWh/24h), when applicable | - | N |
| 6.3 | Instruction sheet | - | - |
| | An instruction sheet or manual in both Arabic and English shall be delivered with each water heater | Arabic and English | P |
| | Tables, drawings and circuit diagrams may be depicted in English only | See instruction manual | P |
| | The instruction sheet or manual shall include the following information as a minimum: | - | - |
| | a) Supplier's name or trade mark | SAUDI CERAMICS | P |

| Clause | Requirement – Test | Result - Remark | Verdict |
|--------|---|-------------------------------|---------|
| | b) Supplier's model number | EWB-V30SL | P |
| | c) Declared load profile | S | P |
| | d) Energy Efficiency Class of the model | E | P |
| | e) Water heating energy efficiency in % | 73.7% | P |
| | f) Annual electricity consumption in kWh under average climatic condition for Saudi Arabia | 630kWh | P |
| | g) If applicable, other load profiles for which the water heater is suitable to use and the corresponding water heating energy efficiency and annual electricity consumption as set out in points (e) and (f) | - | N |
| | h) Thermostat temperature setting | 60°C | P |
| | i) specific precautions that shall be taken when the water heater is assembled, installed or maintained | See instruction manual | P |
| | j) Where Smart Control Compliance is declared as being enabled | - | N |
| | k) annual electricity consumption in kWh (or mass of butane equivalent when applicable) | - | N |
| | l)) Collector aperture area in m ² | - | N |
| | m) zero-loss efficiency | - | N |
| | n) First-order coefficient (W/(m ² . K ²)) | - | N |
| | o) Second-order coefficient (W/(m ² . K ²)) | - | N |
| | p) Incidence angle modifier (I _{am}) | - | N |
| | q) Storage Capacity in Liters | 30L | P |
| | r) pump power consumption in W | - | N |
| | s) standby power consumption in W, | - | N |
| | t) Annual non-solar heat contribution Q _{nonsol} in kWh | - | N |
| | u) Annual auxiliary electricity consumption Q _{aux} | | |
| | In addition, for solar water heaters, the instruction sheet or manual shall include the following: | Electric storage water heater | - |
| | • The information specified in clause 6.2 and Table 6 | - | N |
| | • Dimensions of the unit | - | N |
| | • Instruction for mounting and connection to the pipes | - | N |
| | • Instruction for connection to the electrical installation | - | N |
| | • Instructions necessary for the correct operation of the unit and any special precautions to be observed to ensure its safe use and maintenance | - | N |
| | • Instruction for packing and unpacking the unit | - | N |
| | • Instructions on unit handling and rigging | - | N |
| | • Net weight of the unit (empty) | - | N |

| | | | | |
|-------|---|------------|----------------------------|---|
| AMD 4 | Design and Dimension of Energy Efficiency Label | | | - |
| | Monitored point | Limit (mm) | Measured (mm) | - |
| | Hot Storage Tank (A) | 170 | 170.32 | P |
| | Water Heater (B) | 100 | 100.15 | P |
| | Instantaneous Water Heater (C) | 75 | - | N |
| | (D) | 45 | - | N |
| | Hot Storage Tank Water Heater | | Instantaneous Water Heater | |

| | | | | | | | |
|---|--|-----------------------|-------------------|------|-------------------|-----------|------------------|
| ANNEX C | Calculation of the Energy Efficiency | | | | | | |
| C.3 | Calculation of the Energy Efficiency Coefficient η_{wh} | | | | | | |
| C3.1 | Conventional Water Heaters and HeatPump Water Heaters | | | | | | |
| $\eta_{WH} = \frac{Q_{ref}}{(Q_{fuel} + CC \cdot Q_{elec})(1 - SCF.smart) + Q_{cor}}$ | | Q _{ref} | Q _{fuel} | CC | Q _{elec} | SCF.smart | Q _{cor} |
| | | 2.10 | 0 | 1.00 | 3.05 | 0 | -0.22 |
| | | $\eta_{wh} = 74.18\%$ | | | | | |

| | | | | |
|--|---|--------------|---|--|
| C.6 | Determination of the mixed quantity of water V40 | | | |
| $V_{40} = V_{40;exp} \times \frac{(\theta_p - 15)}{(40 - 15)}$ | The normalized value of the average temperature | θ_p | - | |
| | Corresponds to the quantity of water delivered at least 40°C during test. | $V_{40;exp}$ | - | |
| | V₄₀=- | | | |

| | | | |
|---------|--|-----------|---|
| ANNEX D | Calculation of the Annual Energy Consumption | | |
| D.1 | Principle for Calculation of the Annual Energy Consumption (AECWH) | - | - |
| | The annual energy is based on the energy efficiency ratio AEC_{WH} used for Classification and the reference energy Q _{refused} to characterize the water heaters. | 638kWh/y | P |
| D.2 | Weather Data for Saudi Arabia | - | - |
| | the following data are applied, in addition to the data used for test of the water heaters and water storage tanks (tables D1 and D2) | See table | P |

| Clause | Requirement – Test | Result - Remark | Verdict |
|---|--|--|--|
| D.3 | Calculation and Presentation of the Annual Energy Consumption (AEC_{WH}) | | - |
| D.3.1 | For Conventional Water Heaters | | - |
| $AEC_{WH} = 220 \times Q_{ref} / \eta_{wh;KSA}$ | | Q_{ref} | $\eta_{wh;KSA}$ |
| | | 2.10 | 72.36% |
| | | $AEC_{WH} = 638 \text{ kWh/y}$ | |
| $\eta_{WH;KSA} = \frac{1}{1 + \left(\frac{1 - \eta_{WH}}{\eta_{WH}} \right) \times \left(\frac{65 - \vartheta_{amb;test}}{65 - \vartheta_{amb;KSA}} \right)}$ | | η_{wh} | $\vartheta_{amb;test}$ |
| | | 74.18% | 20°C |
| | | $\eta_{wh;KSA} = 72.36\%$ | |
| Ambient temperature for test: $\vartheta_{amb;test} = 20^\circ \text{C}$ | | - | - |
| Ambient temperature for label: $\vartheta_{amb;KSA} = 24^\circ \text{C}$ | | - | - |

Remarks:

Photo No. 1 (Marking)


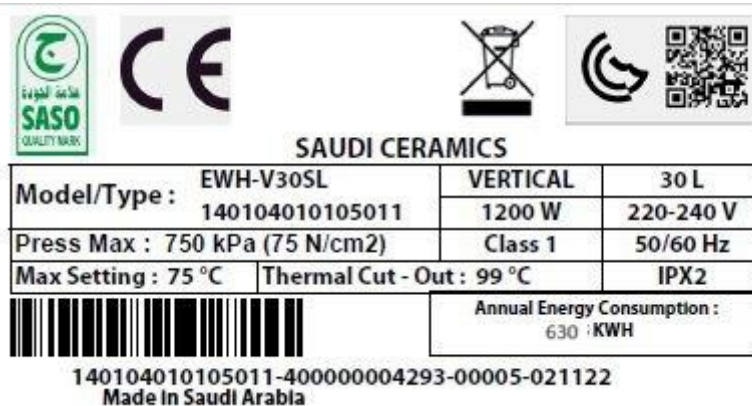


Photo no.2 (General view / External package)



| Clause | Requirement – Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

Photo no.3 (Energy efficiency label / QR code)

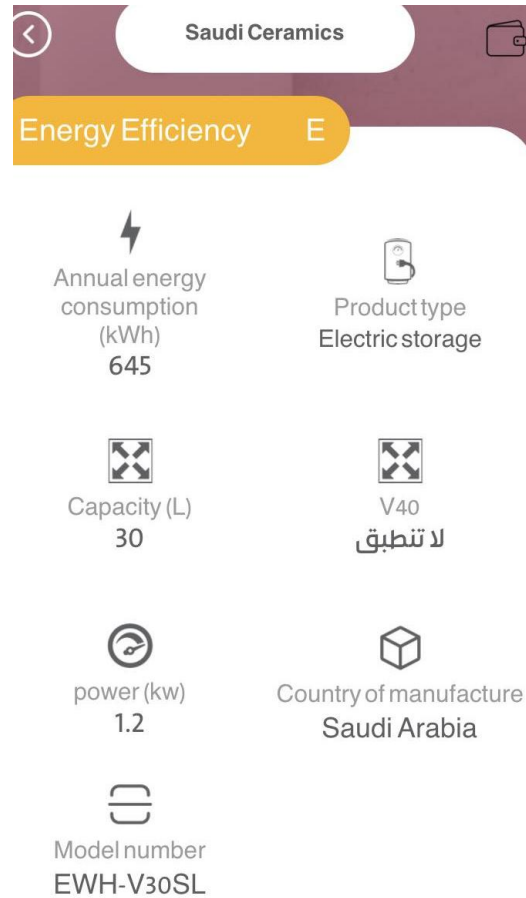

| Clause | Requirement – Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

Photo no.4 (Energy efficiency test report)

SAITCOSaudi Inspection & Testing Co
الشركة السعودية للفحص والاختبار

Report Reference

E230485EEFS6R00

Storage Water Heater Test Data:

| | | | | | | |
|---------------------------|-------------------|----------------------------------|--------------------------|-----------------------|-------|-----|
| Applicable Standard(s) | | SASO-2884:2017, BS EN 50440-2015 | | | | |
| Manufacturer | Country of Origin | Model | Type | Sub Type | | |
| SAUDI CERAMICS | SAUDI ARABIA | EWB-V30SL | Electric | Storage | | |
| Test Start Date | Testing Stop Date | Load Profile | Rated Power | Actual Power | | |
| 4/30/2023 | 5/1/2023 | S | W | W | | |
| | | | 1200 | 1101 | | |
| Actual Capacity | Rated Capacity | T3 | T5 | Ambient | Smart | SCF |
| Litres | Litres | °C | °C | °C | 0 | 1 |
| 30.00 | 30.00 | 54.37 | 49.33 | 20.31 | | |
| $Q_{testelec}$ | Q_{ref} | Q_{H2O} | Q_{elec} | Q_{cor} | | |
| kWh | kWh | kWh | kWh | kWh | | |
| 2.93 | 2.10 | 2.14 | 3.05 | -0.22 | | |
| $V_{full-drawing\ water}$ | CC | η_{elecwh} | η_{wh} | MEPS MIN. η_{wh} | | |
| Litres | Coefficient | % | % | % | | |
| 56.93 | 1.00 | 68.87 | 74.18 | 63.00 | | |
| $\eta_{wh,KSA}$ | Rated AEC | Actual AEC | Actual AEC _{WH} | Efficiency Class | | |
| % | kWh/y | kWh/y | kWh/y | E | | |
| 72.36 | 645 | 622 | 638 | | | |

| Clause | Requirement – Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

Photo No.5 (Classification as per declared load profile)

| Table 3 – ENERGY EFFICIENCY CLASSIFICATION as per DECLARED LOAD PROFILE | | | | | | | | | | | | |
|---|--------------|---|--------------|-----|-----|-----|-------|-----|-----|-----|-----|-----|
| Energy Efficiency in % | | | | | | | 74.18 | | | | | |
| Bar Color | Energy Class | | LOAD PROFILE | | | | | | | | | |
| | | | 3XS | 2XS | XS | S | M | L | XL | 2XL | 3XL | 4XL |
| Dark Green | أ | A | 95 | 100 | 105 | 105 | 210 | 300 | 300 | 300 | 300 | 300 |
| Green | ب | B | 87 | 89 | 97 | 97 | 140 | 160 | 160 | 160 | 160 | 180 |
| Light Green | ج | C | 77 | 79 | 87 | 87 | 93 | 95 | 98 | 110 | 110 | 110 |
| Yellow | د | D | 69 | 71 | 79 | 79 | 87 | 87 | 92 | 93 | 93 | 93 |
| Orange | هـ | E | 61 | 63 | 71 | 71 | 80 | 80 | 86 | 86 | 86 | 86 |
| Red | و | F | 53 | 55 | 63 | 63 | 73 | 73 | 79 | 79 | 79 | 79 |
| Dark Red | ز | G | 45 | 47 | 55 | 55 | 65 | 65 | 71 | 71 | 71 | 71 |

Sign 
Date 03/05/2023

Inspected by

REMARK :***SOFT COPY OF THE CONTROL TEST RESULTS SHEET AUDITING BY LAB SUPER VISOR.**

<<End of control of test result sheet>>

